



MOROOKA

MST-1000VDL



- Maximum Payload is 5.5t
- Auto Decel function
- Hardox® In My Body certified dump body
- LED Headlight

MST-1000VDL

Auto Decel function



When idling continues for a certain period of time, engine speed automatically lowers to improve fuel efficiency, noise and CO₂ emission are also reduced.

HST Speed mode



Alongside the conventional high and low-speed options, you now have the choice of three different speed modes. This allows for not only high-speed driving but also stable low-speed maneuvering.

Electric control travel levers



Electric control travel levers enable smooth and stress-free operation for operators. Furthermore, by expanding the available floor space, it also enhances overall livability.

Improvement in maintainability




Because openable air conditioner condensers and foldable oil coolers have been adopted, and a removable dust-proof net has been installed in front of the radiator, they are easy to clean.

Main specifications

MODEL	MST-1000VDL	
PERFORMANCE		
Maximum Payload	kg (lbs)	5,500 (12,126)
Speed (High/Low)	kph (mph)	10.2 (6.4) / 7.1 (4.5)
Ground pressure (Empty/Laden)	kPa (psi)	25.6 (3.7) / 43.9 (6.4)
MACHINE DIMENSION & WEIGHT		
Machine Weight	kg (lbs)	7,700 (16,976)
Overall Length	mm (ft.in.)	5,550 (18' 3")
Overall Width (Transport)	mm (ft.in.)	2,500 (8' 3")
Overall Height	mm (ft.in.)	2,710 (8' 11")
Ground Clearance	mm (ft.in.)	425 (1' 5")
Track Width	mm (in.)	600 (24")
DUMP BED		
Length × Width	mm (ft.in.)	3300 (10'10") × 2100 (6'11")
ENGINE		
Name	CAT C4.4	
Nominal Output	kW(HP)/min ⁻¹	92.6 (126) / 2200
ANK CAPACITY		
Fuel Tank Capacity	ℓ (gal)	127 (34)
HST Oil Tank Capacity	ℓ (gal)	54 (15)
DEF Tank Capacity	ℓ (gal)	19 (6)

Body dimensions

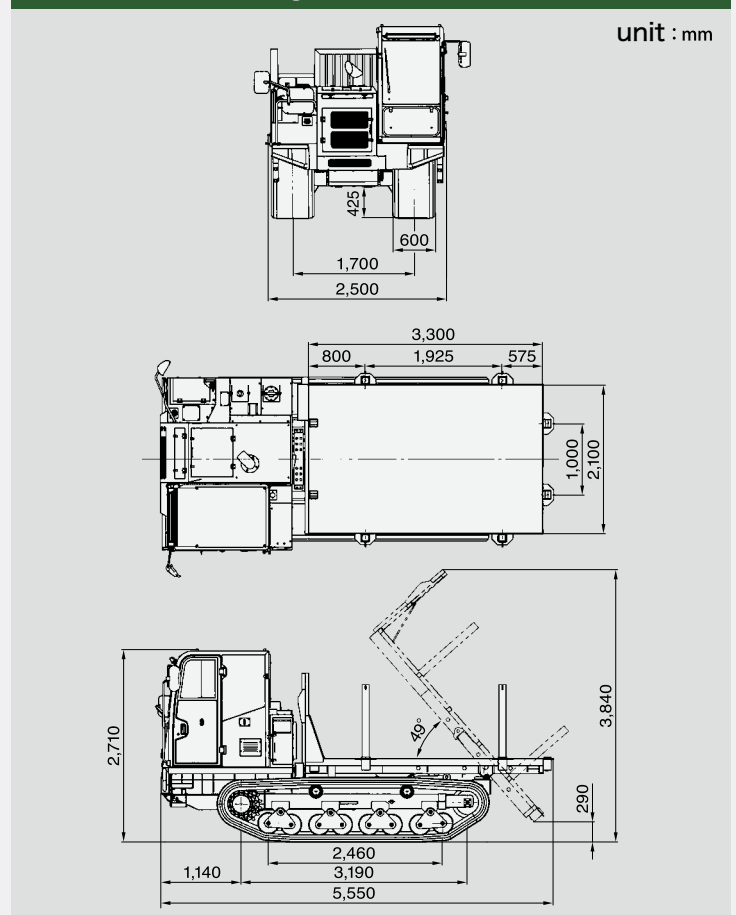

MOROOKA
Morooka Co., Ltd.

URL: www.morooka.com (English) www.morooka.co.jp (Japanese)
Postal Code : 301-0031
358 Shoubeeshindenmachi, Ryugasaki city, Ibaraki Prefecture, Japan
TEL : +81-297-66-2111 TEL : (Overseas Sales Dept.) : +81-297-86-9034



CONTACT